

DURARO

Stainless Steel Castors

The Duraro series is the perfect solution for mobile equipment that requires exceptional performance and durability in humid environments.

The N80SS series is designed to provide superior corrosion resistance and durability, making it ideal for use in kitchens, refrigerating rooms, and laboratories where equipment is exposed to moisture on a frequent basis. In addition, Duraro castors are also suitable for medical or laboratory equipment that requires regular sanitation with disinfectants.

Trust Duraro series castors to provide the safety, reliability and performance you need for your mobile equipment in humid environments.

Application:

Kitchen trolley
Food cart of food processing plant and restaurant
Lab equipment

Size available :

75*32, 100*32, 125*32, 150*32mm



Pressed stainless steel, double ball-race swivel yoke, electrolytic polishing finish.
Patented double pedals total / directional locking system for light and quiet operation.

Top Plate Fitting TPR wheel S/S precision ball bearing

Total Lock



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N380XP2SS/03US	75	32	P2	42.5	108	116	82	60
N480XP1SS/03US	100	32	P1	38	134	116	107	100
N580XP1SS/03US	125	32	P1	38	161.5	116	135	120
N680XP1SS/03US	150	32	P1	37.5	189.5	116	161	120

Directional Lock



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N380XDP2SS/03US	75	32	P2	42.5	108	116	82	60
N480XDP1SS/03US	100	32	P1	38	134	116	107	100
N580XDP1SS/03US	125	32	P1	38	161.5	116	135	120
N680XDP1SS/03US	150	32	P1	37.5	189.5	116	161	120

Free Swivel



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N381P2SS/03US	75	32	P2	42.5	108	83	--	60
N481P1SS/03US	100	32	P1	38	134	91	--	100
N581P1SS/03US	125	32	P1	38	161.5	104	--	120
N681P1SS/03US	150	32	P1	37.5	189.5	116	--	120


Rigid



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
Y382P1SS/03US	75	32	P1	--	108	--	--	60
Y482P1SS/03US	100	32	P1	--	134	--	--	100
Y582P1SS/03US	125	32	P1	--	161.5	--	--	120
Y682P1SS/03US	150	32	P1	--	189.5	--	--	120



Conductive wheel is also available.
Add "K-AS" suffix to Catis code,
e.g. N580XP1SS/03USK-AS

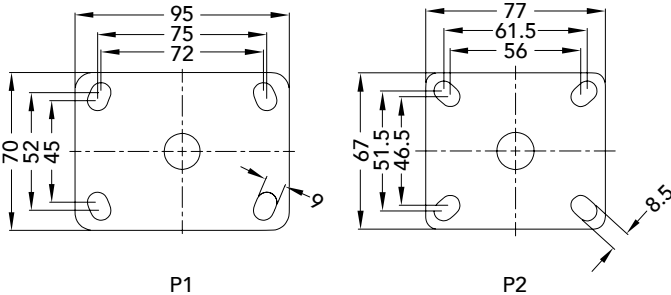

Bolt Hole Fitting TPR wheel S/S precision ball bearing

Total Lock



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N380XH1SS/03US	75	32	H1	42.5	105.5	116	82	60
N480XH2SS/03US	100	32	H2	38	131.5	116	107	100
N580XH2SS/03US	125	32	H2	38	159	116	135	120
N680XH2SS/03US	150	32	H2	37.5	187	116	161	120

Directional Lock



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N580XDH2SS/03US	125	32	H2	38	159	116	135	120
N680XDH2SS/03US	150	32	H2	37.5	187	116	161	120


Free Swivel



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N381H1SS/03US	75	32	H1	42.5	105.5	83	--	60
N481H2SS/03US	100	32	H2	38	131.5	91	--	100
N581H2SS/03US	125	32	H2	38	159	104	--	120
N681H2SS/03US	150	32	H2	37.5	187	116	--	120



Conductive wheel is also available.
Add "K-AS" suffix to Catis code,
e.g. N580XH2SS/03USK-AS



Code	Ø	Mating Bolt Size
H1	10.1	M10
H2	12.1	M12
H3	12.9	1/2 "

Pressed stainless steel, double ball-race swivel yoke, electrolytic polishing finish.
Patented double pedals total / directional locking system for light and quiet operation.

Top Plate Fitting PM wheel S/S roller bearing

Total Lock



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 mm	 kg
N380XP2SS/09RXS	75	32	P2	42.5	108	116	82	60
N480XP1SS/09RXS	100	32	P1	38	134	116	107	100
N580XP1SS/09RXS	125	32	P1	38	161.5	116	135	120

Directional Lock



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N380XDP2SS/09RXS	75	32	P2	42.5	108	116	82	60
N480XDP1SS/09RXS	100	32	P1	38	134	116	107	100
N580XDP1SS/09RXS	125	32	P1	38	161.5	116	135	120

Free Swivel




Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N381P2SS/09RXS	75	32	P2	42.5	108	83	--	60
N481P1SS/09RXS	100	32	P1	38	134	91	--	100
N581P1SS/09RXS	125	32	P1	38	161.5	104	--	120

Rigid



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
Y382P1SS/09RXS	75	32	P1	--	108	--	--	60
Y482P1SS/09RXS	100	32	P1	--	134	--	--	100
Y582P1SS/09RXS	125	32	P1	--	161.5	--	--	120

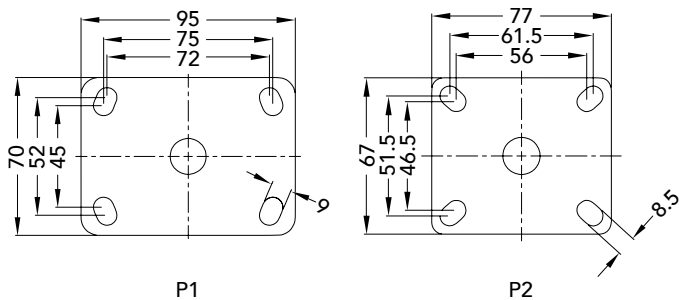

Bolt Hole Fitting PM wheel S/S roller bearing

Total Lock



Catis Code	 mm	 mm	 Fitting	 mm	 mm	 mm	 mm	 kg
N380XH1SS/09RXS	75	32	H1	42.5	105.5	116	82	60
N480XH2SS/09RXS	100	32	H2	38	131.5	116	107	100
N580XH2SS/09RXS	125	32	H2	38	159	116	135	120

Directional Lock




Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N580XDH2SS/09RXS	125	32	H2	38	159	116	135	120

Free Swivel



Catis Code	mm	mm	Fitting	mm	mm	mm	mm	kg
N381H1SS/09RXS	75	32	H1	42.5	105.5	83	--	60
N481H2SS/09RXS	100	32	H2	38	131.5	91	--	100
N581H2SS/09RXS	125	32	H2	38	159	104	--	120



Code	Ø	Mating Bolt Size
H1	10.1	M10
H2	12.1	M12
H3	12.9	1/2 "